



Lone Star Spirit

SPC COLLECTION



LI-TS104 More Mesa

Lone Star Spirit, measuring 6 feet long with 7 and 9-inch width options, offers versatile and refined exotic wood-like designs using the latest EIR embossing technology with 8-10 repeats on film designs. Its unique designs are tailor-made for western markets and are only available at Lions Floor. The collection is also water resistant, scratch-resistant, antibacterial-cured, easy to install, low-maintenance, eco-friendly, durable, and long-lasting, making it perfect for both budget-conscious DIYers and luxury-minded homeowners.



Water Resistant



Indent Resistant



Paw Friendly



Sound Tested



CERTIFIED BY
SCS Global Services

Lone Star Spirit

SPC COLLECTION

Specifications

Material Type	SPC
Plank Size	6' x 7"
Total Thickness	5.5 mm
Core Thickness	4 mm
Wear Layer	20 mil
Attached Pad	Yes
Pad Thickness	1.5 mm
Pad Type	Anti Bacterial & Acoustic
Edge Profile	Painted Bevel
Installation Type	Uniclic
Plank Repeat	10
Texture/Style	Embossed in Register (EIR)
Box Size	28.37 sq. ft.
Pieces/Box	8 pieces
Lbs./Box	50 lbs.
Pallet Size	40 boxes
Container Size	960 boxes



Colors



LI-TS101 Sunnyside Up



LI-TS102 Toffeenut Umber




LI-TS103 Almont Haze



LI-TS104 More Mesa




LI-TS105 Chocolat

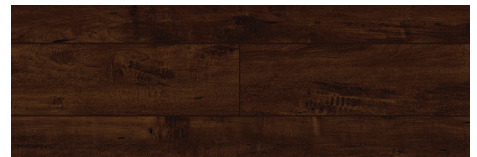

LI-TS106 Saddle Brownie



LI-TS107 Skyfall Groove

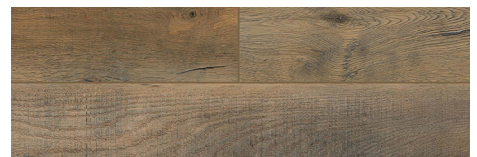

LI-TS108 Odessa Palm

Moldings

Seamlessly blend together our high-performing flooring products with the desired trim to create the desired aesthetic. Our moldings coordinate with all our collections and respected colors.



End Cap

35 mm x 10 mm
(1.378" x .394")



Flush Stair Nose

110.4 mm x 5.1 mm
(4.346" x .201")



Quarter Round

25.4 mm x 15.2 mm
(1.77" x .598")



Reducer

25.4 mm x 15.2 mm
(1.77" x .598")



T-Molding

45.4 mm x 3.9 mm
(1.787" x .154")

Testing

Fire Rating	ASTM E648	Class 1	Average Wear Layer Thickness	ASTM F410	21.4 mil
Coefficient of Friction	ASTM D2047	Standard Neolite 0.93	Dimensional Stability, Curl After Heat	ASTM F2199	Passes
Static Load Limit	ASTM F970	0.005 in.	Residual Indentation, Surface Integrity	ASTM F1914	Passes
IIC - Impact Sound Rating	E492	57 db	Resistance to Heat	ASTM F1514	Passes
STC - Sound Transmission Loss	E90	53 db	Resistance to Light	ASTM F1515	Passes
Overall Thickness	ASTM F387	0.231 in.	Floor Score Certified Phthalate Free		