



### TEST REPORT

DATE: 11-15-2022

Page 1 of 1

TEST NUMBER: 0291617

<b>CLIENT</b>	Lions Floor
---------------	-------------

<b>TEST METHOD CONDUCTED</b>	ASTM F410 Standard Test Method for Wear Layer Thickness of Resilient Floor Coverings by Optical Measurement
------------------------------	---




DESCRIPTION OF TEST SAMPLE	
<b>IDENTIFICATION</b>	Lions Floor - Lone Star Spirit XL Collection
<b>COLOR</b>	Artisan Touch - LI-TS201
<b>CONSTRUCTION</b>	SPC
<b>BACKING</b>	EVA

#### GENERAL PRINCIPLE

The thickness of the wear layer of resilient non-textile floor coverings is determined by microscopic optical measurement. The specimen is examined in five areas and measurements are made on the outer most layer of the composite material. The measurements are recorded to the .0001 inch and averaged.

#### TEST RESULTS

		THICKNESS	
	SPECIMEN 1	0.0217 inch	
	SPECIMEN 2	0.0209 inch	
	SPECIMEN 3	0.0204 inch	
	SPECIMEN 4	0.0200 inch	
	SPECIMEN 5	0.0203 inch	
<b>AVERAGE TOTAL THICKNESS</b>		0.0207 Inch	20.7 mil

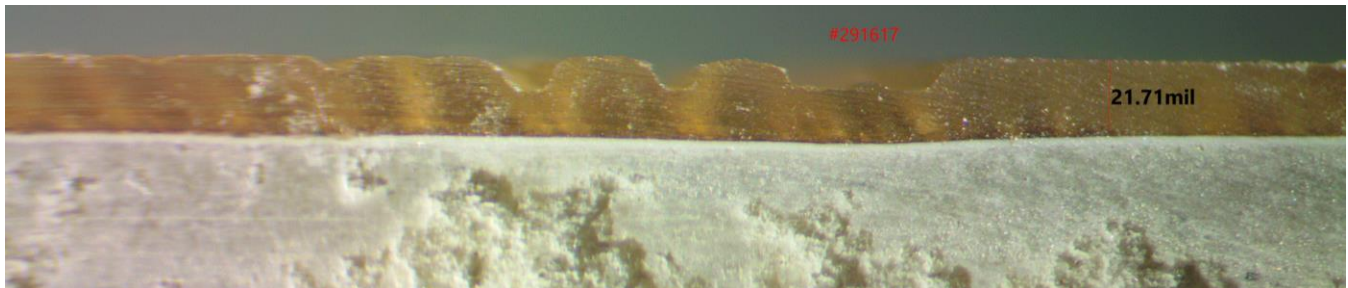

APPROVED BY: *Gary Anthony*

This report is provided for the exclusive use of the client to whom it is addressed. It may be used in its entirety to gain product acceptance from duly constituted authorities. This report applies only to those samples tested and is not necessarily indicative of apparently identical of similar products. This report, or the name of Professional Testing Laboratory Inc. shall not be used under any circumstance in advertising to the general public.