

TEST REPORT

CLIENT Lions Floor

TEST METHOD CONDUCTED	ASTM F410 Standard Test Method for Wear Layer Thickness of	
	Resilient Floor Coverings by Optical Measurement	



DESCRIPTION OF TEST SAMPLE		
IDENTIFICATION	Lions Floor - Lone Star Spirit Collection	
COLOR	Lone Star Spirit - Sunnyside UP LI-TS101	
CONSTRUCTION	SPC	
BACKING	EVA	


GENERAL PRINCIPLE

The thickness of the wear layer of resilient non-textile floor coverings is determined by microscopic optical measurement. The specimen is examined in five areas and measurements are made on the outer most layer of the composite material. The measurements are recorded to the .0001 inch and averaged.

TEST RESULTS

	THICKNESS	
SPECIMEN 1	0.0216 inch	
SPECIMEN 2	0.0212 inch	
SPECIMEN 3	0.0217 inch	
SPECIMEN 4	0.0212 inch	
SPECIMEN 5	0.0211 inch	

AVERAGE TOTAL THICKNESS	0.0214 Inch	21.4 mil

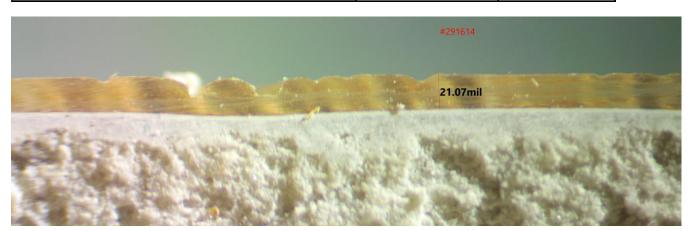

APPROVED BY:

Lang asleny

This report is provided for the exclusive use of the client to whom it is addressed. It may be used in its entirety to gain product acceptance from duly constituted authorities. This report applies only to those samples tested and is not necessarily indicative of apparently identical of similar products. This report, or the name of Professional Testing Laboratory Inc. shall not be used under any circumstance in advertising to the general public.

714 Glernwood Place Dalton, GA 30721 Phone: 706-226-3283 Fax: 706-226-6787 email: protest@optilink.us