



# **Molding Specifications**

INDOOR DELIGHT | LONE STAR SPIRIT | LONE STAR SPIRIT XL


### **END CAP**




## **QUARTER ROUND**




### **FLUSH STAIR NOSE**

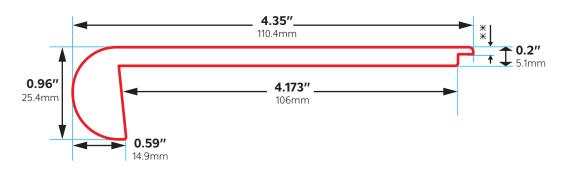

REDUCER

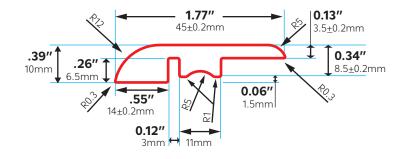


## T-MOLDING






# **Molding Installation**

INDOOR DELIGHT | LONE STAR SPIRIT | LONE STAR SPIRIT XL




#### **FLUSH STAIR NOSE**




5mm Flush stair nose are suitable for 5mm floor, 7mm Flush stair nose are suitable for 7mm floor, the thickness of the floor and the thickness of the stairs at 0.5mm difference can be leveled by glue, when the thickness difference exceeds 0.5mm, you can use hard gasket leveling.


#### REDUCER





# **QUARTER ROUND**



**T-MOLDING** 







It can be installed by adhesive process or Utrack and gaskit.